


HSCC-CORRUGATED

STRAPPING MACHINE

HSCC - CORRUGATED CHUTE DIMENSIONS

MODEL	DIMENSIONS WIDTH		DIMENSIONS HEIGHT	
	HSCC	1650mm	65"	500mm
HSCC	1250mm	49"	500mm	20"
HSCC	850mm	33.5"	500mm	20"

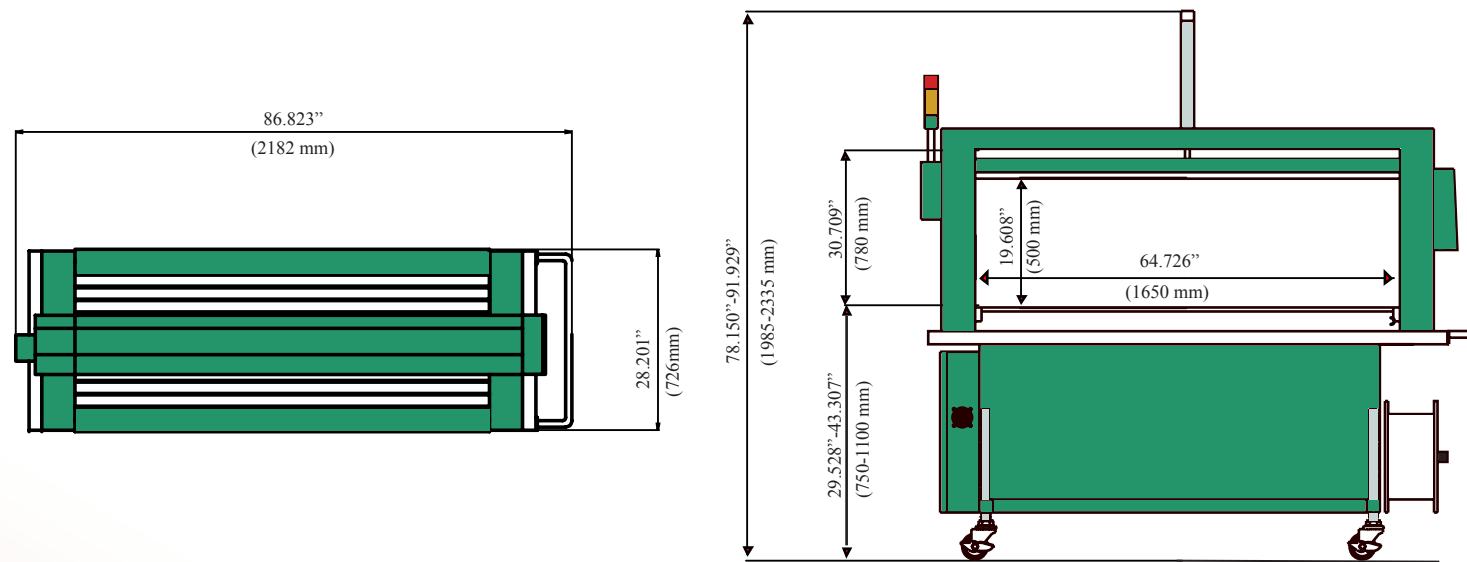

TECHNICAL DATA

Strap Width: 5mm, 6mm, and 9mm
 Strap Tension: 8-35 kg (18-77lbs)
 Speed: Up to 35 bundles per minute
 Adjustable Height: 750mm-1100mm
 (29.5" - 43")

Pneumatics: 6 bars (90psi), 7.5 liters (3 C.F.M)
 Package Size: min. 300mm L x 200mm W
 (12"L x 8"W)
 Net Weight: 500kg (1100lbs)
 Power: 110V 60Hz 1 Phase, 575V 60 Hz 3 Phase

PPI Packaging
 Products Inc.

10 - 6581 Kitimat Road
 Mississauga, Ontario L5N 3T5
 Tel: (905) 507-4040
 Fax: (905) 285-0054
 TOLL FREE: (800) 665-4040
 e-mail: sales@pipack.com
www.ppipack.com

HSCC-CORRUGATED

STRAPPING MACHINE

**DESIGNED AND ENGINEERED EXCLUSIVELY
 FOR THE CORRUGATED INDUSTRY**



PPI Packaging
 Products Inc.

**Just In Time For
 Corrugated Bundling**

www.ppipack.com


Standard Features of The HSCC

One Piece Chute



- Made from a highly durable low friction material the one piece chute allows for smooth jam free feeding and when required will automatically open for easy operator inspection.

Auto Strap Feeding

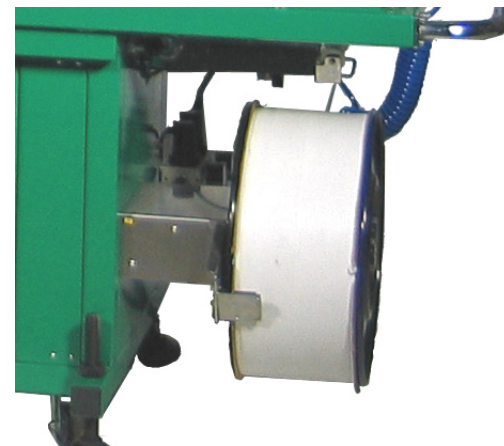


- Equipped for any strapping situation the HSCC features the patented jammed strap ejection device, as well as an operator friendly low strap sensor. Now extensive downtime becomes a thing of the past with these standard features.

Touch Screen Panel




- Leading the way with innovative design, the HSCC offers the latest in advanced Siemens touch screen panel design allowing for easier operator setup and more consistent machine performance in any corrugated environment.

Control Head

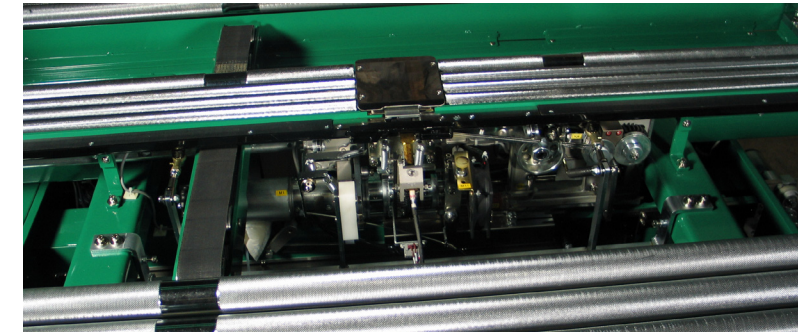

- Engineered using the advanced multi DC brushless motor technology for consistent low cost operation. The HSCC control head has 30% fewer parts. Fewer parts means reduced costs.

PLC Control Panel

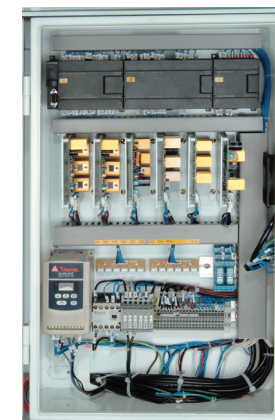

- All HSCC corrugated machines come equipped with a state of the art Siemens PLC control system allowing technicians easy access to diagnostic information should trouble shooting be required.

HSCC Standard Features

- Light Tree Alarm
- Low Strap Sensor
- Auto Strap Ejector
- Full Width Pneumatic Press
- Knurled Roller Driven Table Top
- Variable Speed Conveyour
- Adjustable Machine Height
- Hinged Top Plates
- One Piece Strap Chute
- Automatic Tension Control For All Bundle Sizes